



WATERFALL AUDIO
SOUND DESIGNERS

User's Manual

"On wall" satellite speakers **Sério**

Made in France

We thank you very much for choosing Waterfall Audio speakers. Our deliberate design choice for aesthetics and high performance is constantly guiding our research and development, leading us to major new innovations.

In order to take advantage of the exceptional qualities of our speakers, we recommend you read this manual very carefully. For optimal performance we highly recommend the use of a Waterfall High Force Subwoofer.

Warning : GLASS. FRAGILE : HANDLE & USE WITH CARE.

Important instructions to be read before use



- The speaker you have purchased incorporates one **GLASS PANEL**.
- Any Impact on the product could potentially damage the product.
- There is a potential risk of injury to persons if the product is not used as instructed.
- In the event the speakers break, **DO NOT** attempt to pick up the pieces of glass of the speaker without first protecting your hands and using appropriate tools in collecting the pieces of the speaker.

USE CAUTION WHEN UNPACKING, REPACKING, INSTALLING AND USING THE PRODUCT.

1) Connecting the Serio satellite to the Amplifier :

The satellites should be directly connected to the speaker output of your power amplifier or Audio Video Processor. Always check the correct polarities have been used : (+) red, (-) black.

Never plug the satellites directly into the mains supply.



We highly recommend the use of Waterfall Audio Cable made up with a high quality oxygen free copper, which you can purchase from your Waterfall dealer. The back part of the speaker case has 2 grooves through which the Waterfall cable can be inserted.



2) Installation :

a) on wall




1) Before any fixing please ensure that no electric wire or any pipes will be sectioned in the wall. Make sure that the bracket is strongly fixed to the Wall.

2) Slide the cable through the groove at the back and then slide the satellite on to the wall bracket.

3) Lock the 2 screws at the bottom the speaker with the supplied key.


b) Bookshelf or table positioning

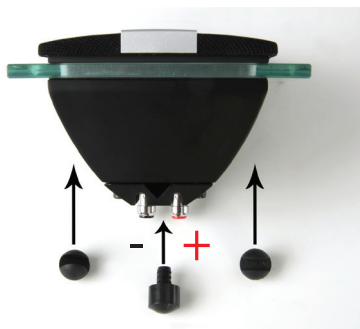

Use the 3 small rubber holders (supplied) as shown, then slide the cable through the grooves at the back of the speaker and put the speaker in the desired position.

c) on stand

see instructions provided with the Waterfall glass & aluminium stand (As floorstanding with optional Aluminium & Glass stands, available in 3 colors (black, silver or white).)

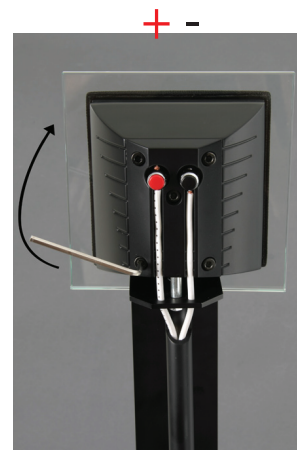

Slide the speaker on the metal pin. Connect the speakers and the lock the 2 screws at the bottom of the speaker with the supplied key.

3) Acoustic Set Up :

The best results depend on the quality set up of your processor or Audio Video Amplifier. All speakers should be in the "small" mode. If the processor gives you a choice for the frequency cut off (crossover) in the Menu, choose a frequency close to 150Hz. On The Waterfall Subwoofer (HF1, HF2 or HF3 Model) **The 24-12-LFE switch must be on the "LFE" position.** Adjust the frequency roll off to the maximum (150Hz). Adjust the volume level to your convenience. For any kind of set up, stereo or multi-channel, the Subwoofer should be positioned as close as possible to the front satellites. In order to achieve the best acoustic connection between the sub and the satellites, adjust the "phase" button of the subwoofer to 180°.

The Hurricane Evo Line of products with its innovative technology provides the listener with a new experience in sound, so far unknown with such compact units. Despite their small size, our Hurricane satellites have a very high power handling due to our Heatstream Technology. **However the best result depends on the quality set up of your processor and subwoofer ; please read carefully the Waterfall subwoofer's manual and do not hesitate to call on your appointed Waterfall dealer for the complete set up of your system.**

4) Warranty

See Waterfall Warranty Card

This document is to be included in any resale of the product.



All drivers are developed and manufactured by Atohm (France).

Unité de fabrication et bureaux : ZA Praderies, 83 570 Carcès - France - Tel : +33 (0)4 98 05 11 30 - Fax : +33 (0)4 98 05 11 31 - contact@waterfallaudio.com

www.waterfallaudio.com